

LED TUBE


The LED Tube lets you perfectly light up wide range of the applications such as office, factory and public space. It will ensure bright light and a low energy consumption as well as long life. It is now available from 1,000 to 3,000 lm. in 2ft and 4ft.

PRODUCT FEATURES

- Wide lumen options (2ft: 1,000 lm., 4ft: 1,600, 1,800, 2,100, 2,500 and 3,000 lm.)



- Easy installation, just replace fluorescent lamp (G13) with TOSHIBA LED Tube
- High power factor (≥ 0.95) and low THDi ($< 10\%$)
- Longer lifetime about 40,000 and 50,000 hrs.
- Flammability of plastic is UL94V-0 to prevent fire
- Safety protection in case of wrong installation or misuse
- Environmentally friendly (no mercury, no UV)

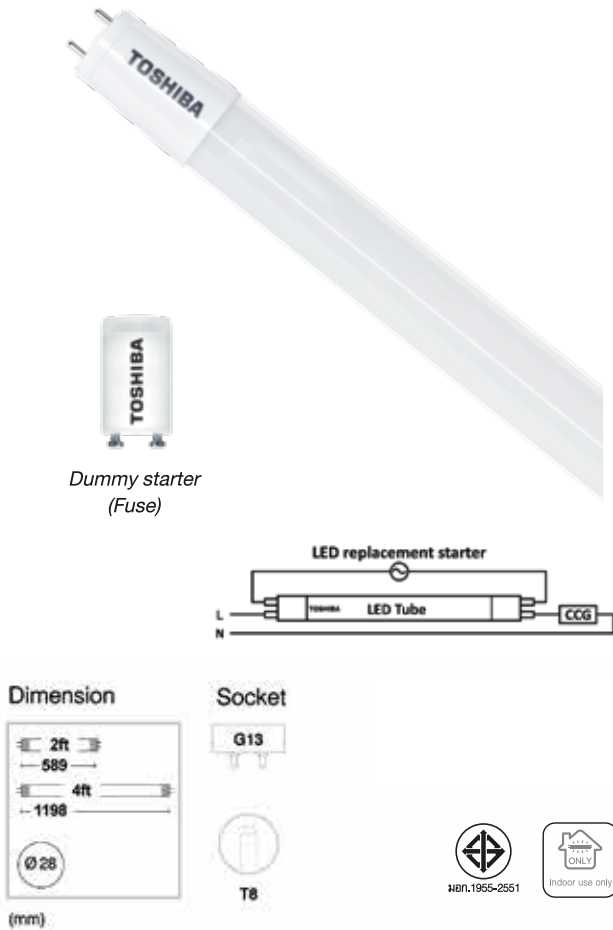

	Voltage (V)	Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temp. (K)	CRI (Ra)	Power Factor	THDi	Surge Protection(KV)	Beam Angle(°)	Lifetime (hrs.)	Operation Temperature (°C)
2ft (589 mm.)												
LDL005D6572-TH	220-240	9	1,000	111.1	6,500	80	≥ 0.95	$< 10\%$	0.5	140	40,000	-20~40°C
4ft (1,198 mm.)												
LDL006D6574-TH	220-240	14	1,600	114.3	6,500	80	≥ 0.95	$< 10\%$	0.5	140	40,000	-20~40°C
LDL007D6574-TH	220-240	16	1,800	112.5	6,500	80	≥ 0.95	$< 10\%$	0.5	140	40,000	-20~40°C
LDL84C1665G1TH4	220-240	16	2,100	131.3	6,500	80	≥ 0.95	$< 10\%$	1.0	160	50,000	-20~45°C
LDL84C1865G1TH4	220-240	18	2,500	138.8	6,500	80	≥ 0.95	$< 10\%$	1.0	160	50,000	-20~45°C
LDL84C2065G1TH4	220-240	20	3,000	150.0	6,500	80	≥ 0.95	$< 10\%$	1.0	160	50,000	-20~45°C

